


3500 Schwing Pump

Technical Data.

Portable concrete pump		BP 3500 HDR			
Concrete pump assembly		2020		2018	
Pumping cylinders, dia. x stroke	mm	200 x 2000		180 x 2000	
Differential cylinders, dia. x stroke	mm	125/80 x 2000		125/80 x 2000	
Differential cylinder drive *		PS	RS	PS	RS
Stroke rate per min, max.		15	25	16	26
Concrete output, max. theor.	cbm/h	58	95	48	78
Concrete pressure, max.	bar	137	81	169	100
Charging hopper capacity	l	600			
Dead weight, incl. hydr. oil and fuel	kg	7000			
Dia. of delivery line	mm	150			
Drive power, options *	kW	D-181, E-132, E-160			

* D = Diesel engine, E = Electric motor, PS = piston side, RS = rod side

Dimensions in mm

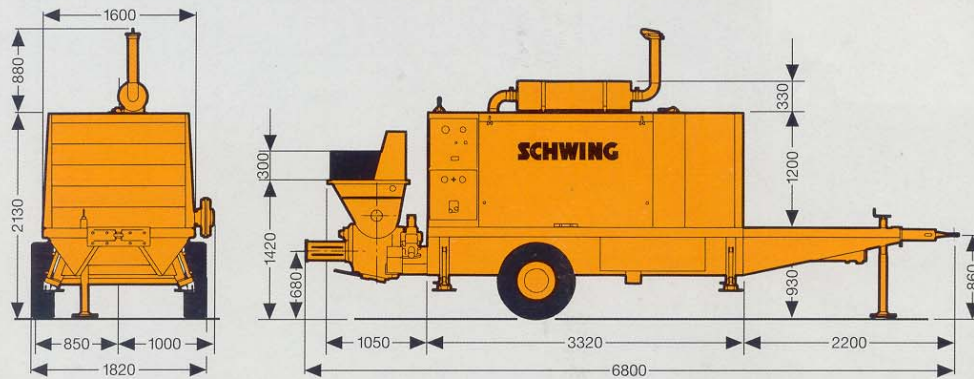

10169877 (3000.07.87) S

SCHWING

SCHWING GmbH
P.O. Box 200362
D-44647 Herne/Germany
☎ (0) 2325/987-0
☎ (0) 2325/72922

Subject to modifications in the
interest of technical progress.
Details of the standard scope of
supply are stated in our quotation.