
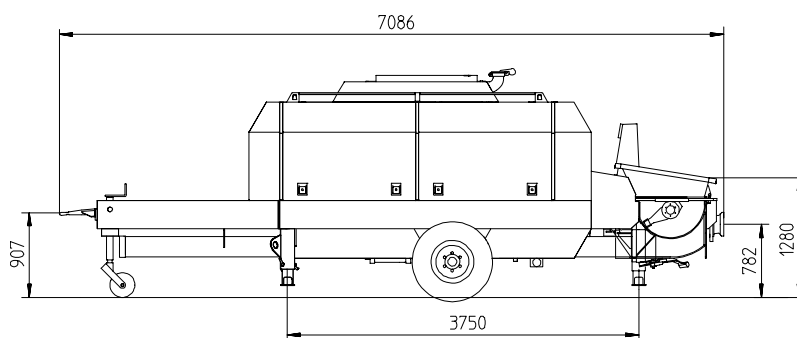


Concrete pump


BSA 2100 HP

Output up to 102 m³/h
 Delivery pressure up to 260 bar



Note: Standard version BSA 2110 HP -D. Dimensions and weights depend on equipment.

Performance diagram

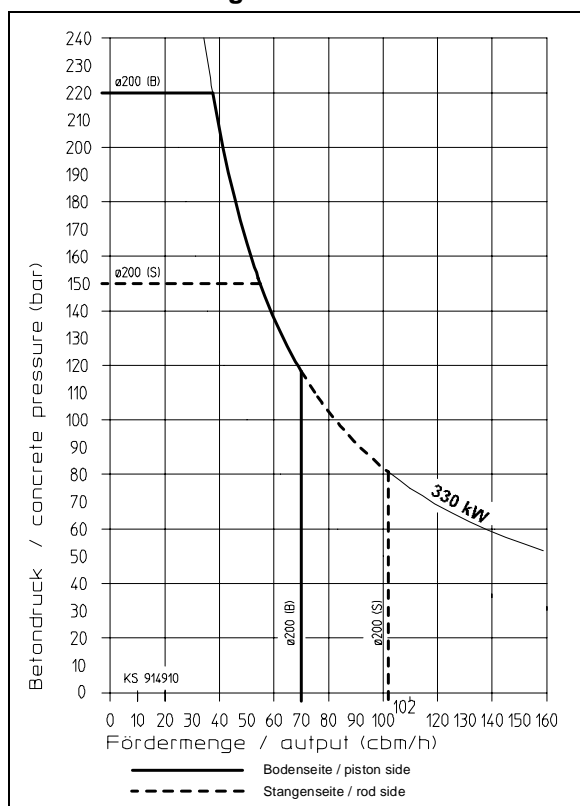

Technical data for concrete pump


Model	BSA	2110 HP -D	2107 HP -E	2109 HP -D	2106 HP -E
Material number		102122.000	100804.009	101114.002	100806.007
Output	m ³ /h	102 / 70*	71 / 47*	82 / 54*	57 / 38*
Delivery pressure	bar	150 / 220 *		185 / 260 *	
Delivery cylinder	∅ mm	200		180	
Delivery cyl. stroke	mm	2100			
Strokes / minute		26 / 18 *	18 / 12 *	26 / 18 *	18 / 12 *
Engine / motor power	kW	330	200 **	330	200 **
Hopper		RS 900 HP			
Capacity	l	600			
Filling height	m	approx. 1.3			
Transfer tube		S 2015 D		S 1812 D	
Pressure connection		6"		5.5"	
Control system		Free-Flow Hydraulics (FFH)			
Weight	kg	8000			

* Values for hydraulic fluid being fed to piston-side.

** Electric motor with 50 Hz
 Electric motor with 60 Hz approx 20% more output / strokes

All data maximum theoretical.

Site example: BSA and stationary boom

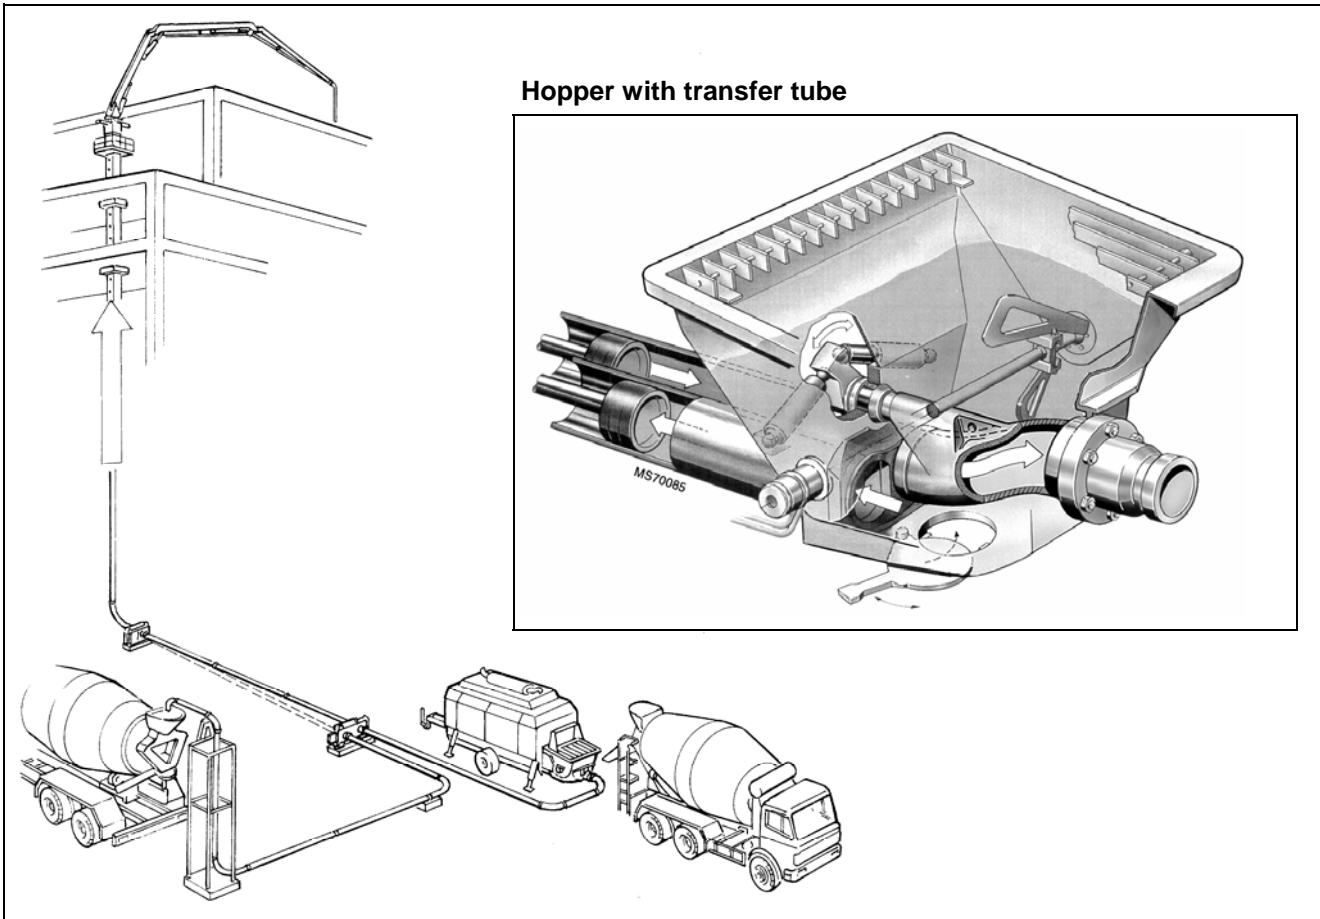

Delivery scope

- Agitator safety switch off
- CE Kit
- Central lubrication on the hopper with hand lever grease gun
- Cleaning accessories
- Concrete hopper with agitator
- Coupling ring (DIN)
- Drive electric 200 KW (BSA 2106 HP -E, BSA 2107 HP -E)
- Drive diesel, Deutz 330 KW (BSA 2109 HP -D, BSA 2110 HP -D)
- Gate valve connection on pump
- Grill 70 mm
- Operating manuals 2xcert.and spare part lists
- Painting: MB 1227 chrome yellow
- Remote control with 10 m cable
- Set-up spindle, mechanically operated
- Side flaps 4x
- Splash guard
- Square outriggers 4x mech.15°-slanging
- Support wheel on towbar
- Tool set incl. standard equipment
- Trailer F 8, can be driven on job site
- Wear parts, hard metal

Optional extras

On request

Please see quotation for exact delivery scope.